

PFA lined CAMLOCK C with safety arms

TYPE PLSC

CAMLOCK C WITH 2 automatic safety lock CAM arms


Fitting standard: A-A-59326/DIN 2828

Assembly: safety clamp

FEP or PTFE liners are available.

Virgin and anti-static liners are available.

Remark: Can be customized.

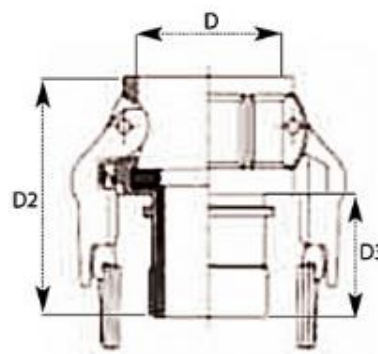

Part no.	Fitting Material	Size	For hose mm	D±0.1 mm	D2 min mm	D3min mm
PLSC019S6	SS316+PFA	3/4"	19	32.0	79.0	34.0
PLSC025S6	SS316+PFA	1"	25	37.0	86.0	34.0
PLSC032S6	SS316+PFA	1-1/4"	32	46.0	92.0	34.0
PLSC038S6	SS316+PFA	1-1/2"	38	54.0	93.0	34.0
PLSC050S6	SS316+PFA	2"	50	64.0	102.0	40.0
PLSC063S6	SS316+PFA	2-1/2"	63	77.0	121.0	52.0
PLSC075S6	SS316+PFA	3"	75	92.2	125.0	56.0
PLSC100S6	SS316+PFA	4"	100	120.0	168.0	80.5