

PFA lined SMS female fitting with smooth hose shank without nut

TYPE PLSF

Female fitting with smooth hose shank without nut


Fitting standard: SMS

Assembly: safety clamp

FEP or PTFE liners are available.

Virgin and anti-static liners are available.

Remark: Can be customized.

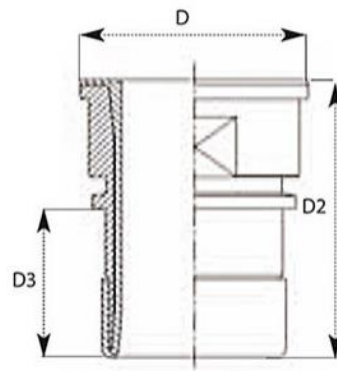

Part no.	Fitting material	Size	For hose mm	D±0.1 mm	D2 min mm	D3 min mm
PLSF025S6	SS316+PFA	25	25	35.5	59.0	34.0
PLSF032S6	SS316+PFA	32	32	42.5	59.0	34.0
PLSF038S6	SS316+PFA	38	38	55.0	67.5	34.0
PLSF050S6	SS316+PFA	51	50	65.0	75.6	40.0
PLSF063S6	SS316+PFA	63.5	63	80.0	100.0	52.0
PLSF075S6	SS316+PFA	76	75	93.0	115.0	56.0
PLSF100S6	SS316+PFA	101.6(max)	100	127.0	122.0	80.5