

PFA lined male threaded with smooth hose shank

TYPE PLGA

Male threaded with smooth hose shank


Fitting standard: EN 14420-8/DIN 2817

Assembly: safety clamp

FEP or PTFE liners are available.

Virgin and anti-static liners are available.

Remark: Can be customized.

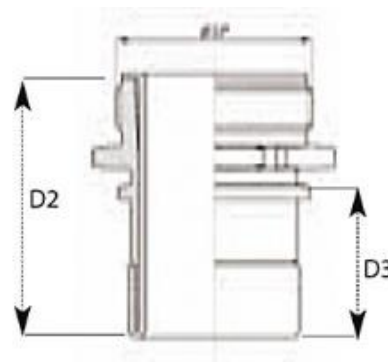

Part no.	Fitting material	Size	For hose mm	Thread	D2 min mm	D3 min mm
PLGA019S6	SS316+PFA	3/4"	19	G3/4	62.0	34.0
PLGA025S6	SS316+PFA	1"	25	G1	63.0	34.0
PLGA032S6	SS316+PFA	1-1/4"	32	G1-1/4	63.5	34.0
PLGA038S6	SS316+PFA	1-1/2"	38	G1-1/2	66.5	34.0
PLGA050S6	SS316+PFA	2"	50	G2	75.5	40.0
PLGA063S6	SS316+PFA	2-1/2"	63	G2-1/2	94.5	52.0
PLGA075S6	SS316+PFA	3"	75	G3	97.5	56.0
PLGA100S6	SS316+PFA	4"	100	G4	131.0	80.5