

PFA lined swivel flange with toothed hose shank

TYPE PLSL

Shank standard: EN 14420-2 / DIN 2817.


Assembly: safety clamp.

Other flange standards are available.

FEP or PTFE liners are available.

Virgin and anti-static liners are available.

Remark: Can be customized.

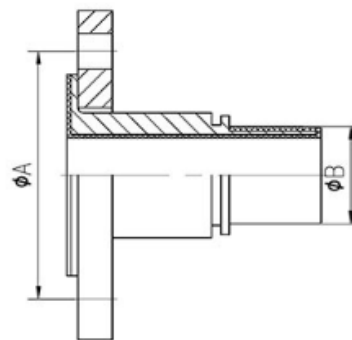

Part no.	Fitting material	Size	Flange standard	For hose mm	D1 min	D2 min
PLSL019S4-EN16	SS304+PFA	3/4"	EN PN16	19	90.0	34.0
PLSL025S4-EN16	SS304+PFA	1"	EN PN16	25	90.0	34.0
PLSL032S4-EN16	SS304+PFA	1-1/4"	EN PN16	32	90.0	34.0
PLSL038S4-EN16	SS304+PFA	1-1/2"	EN PN16	38	91.0	33.5
PLSL050S4-EN16	SS304+PFA	2"	EN PN16	50	107.0	40.0
PLSL063S4-EN16	SS304+PFA	2-1/2"	EN PN16	63	120.0	52.0
PLSL075S4-EN16	SS304+PFA	3"	EN PN16	75	129.0	56.0
PLSL100S4-EN16	SS304+PFA	4"	EN PN16	100	169.0	80.5