

PFA lined female threaded with smooth hose shank

TYPE PLGI

Female threaded with smooth hose shank


Fitting standard: EN 14420-8/DIN 2817

Assembly: safety clamp

FEP or PTFE liners are available.

Virgin and anti-static liners are available.

Remark: Can be customized.

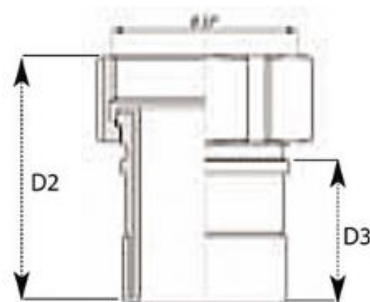

Part no.	Fitting material	Size	For hose mm	Thread	D2 min mm	D3 min mm
PLGI019S6	SS316+PFA	3/4"	19	G3/4	59.0	34.0
PLGI025S6	SS316+PFA	1"	25	G1	62.0	34.0
PLGI032S6	SS316+PFA	1-1/4"	32	G1-1/4	62.0	34.0
PLGI038S6	SS316+PFA	1-1/2"	38	G1-1/2	67.0	34.0
PLGI050S6	SS316+PFA	2"	50	G2	78.0	40.0
PLGI063S6	SS316+PFA	2-1/2"	63	G2-1/2	93.0	52.0
PLGI075S6	SS316+PFA	3"	75	G3	101.0	56.0
PLGI100S6	SS316+PFA	4"	100	G4	139.0	80.5